DESCRIPTION: 2MM RECEPTACLES - DUAL ROW - SMT

UNITS = INCHES [MM]

MATERIAL:

HOUSING:	NYLON 6T, UL 94V-0, BLACK
CONTACT:	PHOSPHOR BRONZE
PLATING:	GOLD FLASH ENTIRE CONTACT

ELECTRICAL:

CURRENT RATING:	2 AMPS
CONTACT RESISTANCE:	20mOHMS Max.
INSULATOR RESISTANCE:	5,000MOHMS Min.
DIELECTRIC WITHSTANDING:	500VAC
OPERATING TEMPERATURE:	-40° TO +105° C
PROCESS TEMPERATURE:	260° C FOR 10 SECONDS

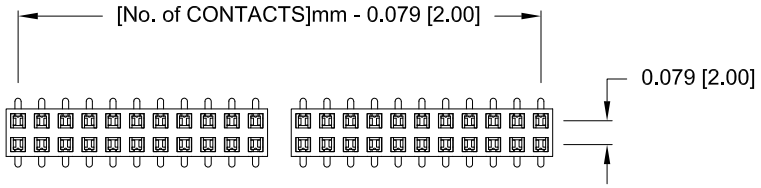

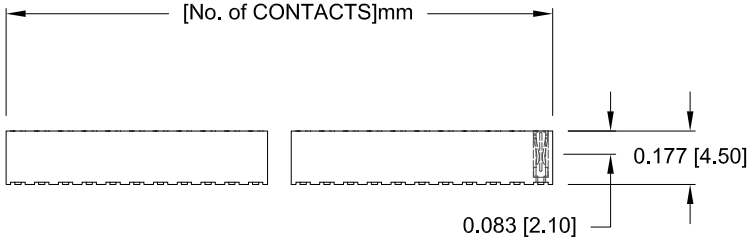



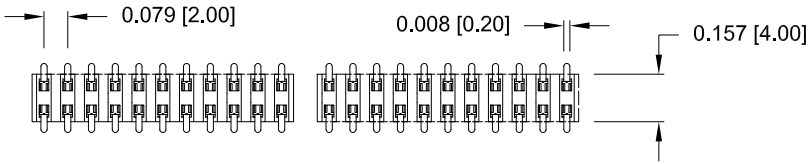

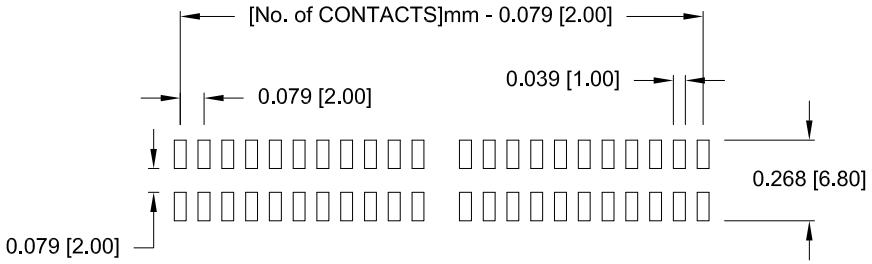

PCB LAYOUT

2864 YY 06 R P2

SERIES
2864 = DUAL ROW
POSITIONS
DUAL - INCREMENTS OF 2
(6 TO 80)
TYPE
06 = SURFACE MOUNT
RoHS COMPLIANT
HIGH TEMP.
PLATING
P2 = GOLD FLASH

GENERAL TOLERANCE = ±0.008 [±0.20]

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	J. KADEL
DATE:	03/05/2019
SCALE:	NTS
SHEET	1 OF 1
REV	0
DWG NO.	2864YY06RP2

NorComp

RoHS COMPLIANT