REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	09-10-04'	XIAO PING
02	△02	變更新料號	2009.09.25	孫 元
03	△03	變更圖號	2012.02.03	黃小燕

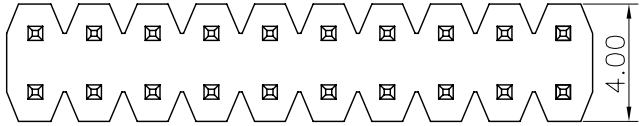

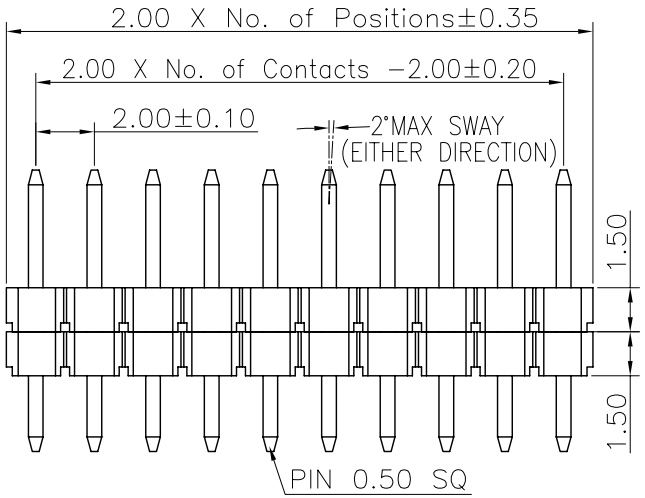

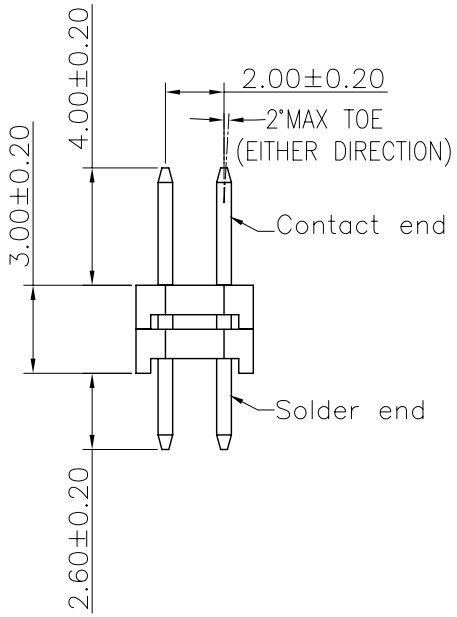

Specifications
Current Rating:2Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:Thermoplastic, UL 94V-0
PBT or the equivalent material
All materials must meet Greenconn requirement for environment protection.

△02 Ordering Information

G PFA204 - XX XX A 004 A 1 A X

- XX: No. of Pins per Row 02~40
- XX: Standard Plating 02=Gold Flash; Selective Plating 01=Tin, 05=Gold Flash/Tin
- 1: Color 1=Black
- X: Standard Packing A=Box; Selective Packing C=Tube

Recommended P.C.Board Layout
(Tolerance:±0.05)



格稜股份有限公司
Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.
03	mm	4:1	1/1

GENERAL TOLERANCE	
X.°±5.0°	X.±0.30
.X°±3.0°	.X±0.25
.XX°±2.0°	.XX±0.15
.XXX°±1.0°	.XXX±0.10

DESIGN: 黃小燕	DATE: 2012.02.03	DWG. NO. △03 △02 GPFA204-CA4AA
CHECKED: 劉北平	DATE: 2012.02.03	
AUDITED: 李 輝	DATE: 2012.02.03	PART NO. △02 GPFA204-XXXX A004A1AX
APPROVED: cc_li	DATE: 2012.02.03	

TITLE.
2.00PIN HEADER
DUAL ROWS DIP TYPE
BASE 1.50H