




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A			2025.11.12	






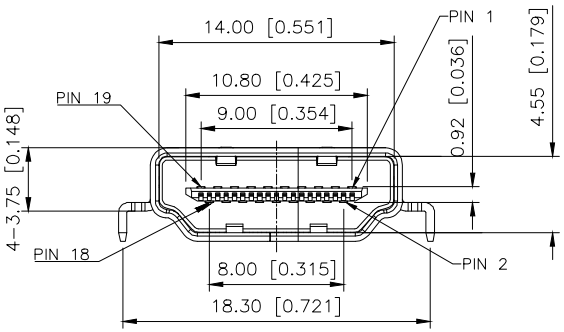

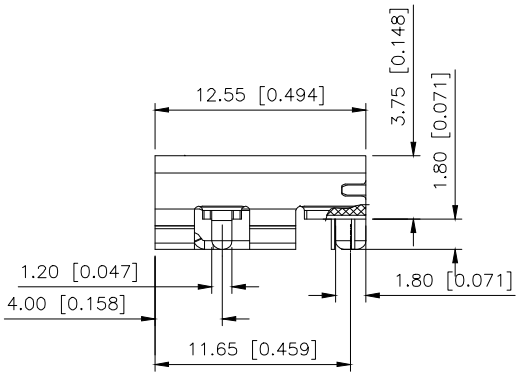

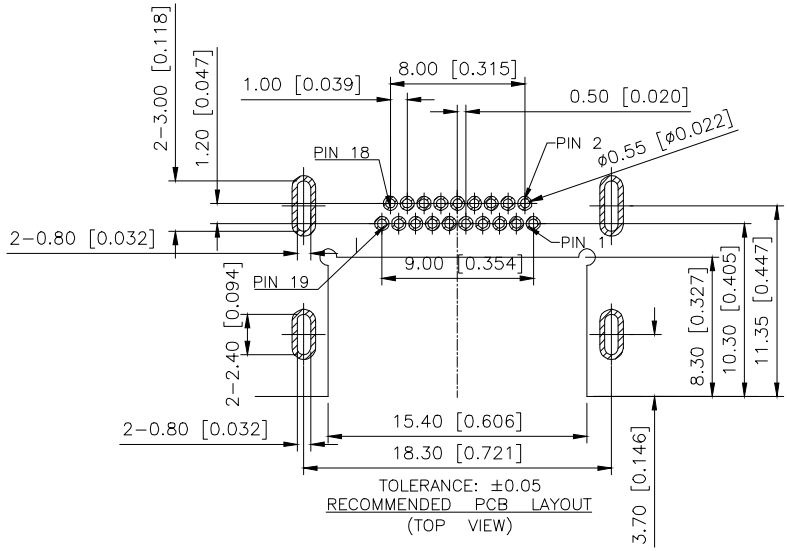

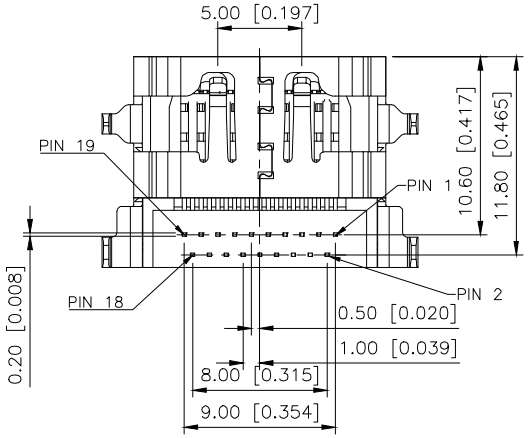

NOTES:
1. ELECTRONIC:
   CONTACT RESISTANCE:20mohm MAX
   INSULATION RESISTANCE:1000 Mohm MIN
   WITHSTAND VOLTAGE:AC 500V.1min.
2. MECHANICAL:
   DURABILITY:10000 CYCLE.
3. ENVIRONMENT CHARACTERISTICS:
   OPERTING TEMPERATURE:-55°C TO +105°C
4. RECOMMANDER PCB THICKNESS 1.2

A71-05H8-111N2

1:Au 1U"
5:Au 15U"
6:Au 30U"

No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	COPPER ALLOY T=0.50	NI PLATED
2	CONTACT	19	COPPER ALLOY T=0.20	AU/TIN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLACK

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection

DESIGN		VIEW:	MODEL TYPE: HDMI CONNECTOR
CHECKED		UNIT: mm/in	PART NO.: A71-05H8-111N2
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1