
注：这张数据表有可能不是很新的。
请从村田制作所的官方网站下载CSTNE16M0V53C000R0的很新数据表。


http://www.murata.com/zh-cn/products/productdetail?partno=CSTNE16M0V53C000R0

CSTNE16M0V53C000R0

目前生产　推 荐　AEC-Q200　RoHS　REACH

外观&形状



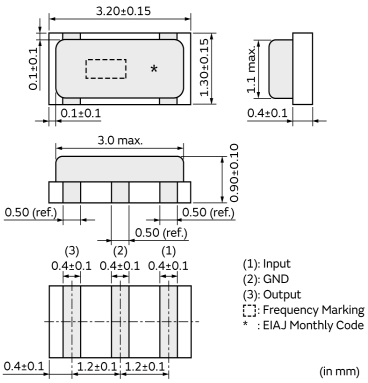

特点

MURATA's package technology expertise has enabled the development of the Chip CERALOCK(R) with built-in load capacitors.
This diverse series owes its development to MURATA's original mass production techniques and high reliability, and has achieved importance in the worldwide automotive market.

Features
1. High reliability and available for a wide temperature range.
2. Oscillation circuits do not require external load capacitors.
3. Available for a wide frequency range.
4. Extremely small and have a low profile.
5. No adjustment is necessary for oscillation circuits.
6. Stable supply is ensured due to not using precious metal(Palladium).

用途

汽车用途	动力传动/安全
其他用途	汽车级

包装信息

包装	规格	标准包装数量
R0	180mm压纹带	3000

注意
1. 本目录是从株式会社村田制作所网站中下载的。规格若有变更，或若其中产品停产，请在订购时确认，恕不另行通知。
2. 本目录因没有足够的空间说明详细规格，仅载明标准规格。因此，在订购产品之前，谨请核准其规格或者办理产品规格表。

注：这张数据表有可能不是很新的。
请从村田制作所的官方网站下载CSTNE16M0V53C000R0的很新数据表。

http://www.murata.com/zh-cn/products/productdetail?partno=CSTNE16M0V53C000R0

CSTNE16M0V53C000R0

规格

产品型	陶瓷谐振器
系列名	CSTNE_V_C
频率	16.000MHz
频率公差	±0.50% max.
工作温度范围	-40℃ to 125℃
频率温度特性	±0.15% max.
频率老化	±0.10% max.
谐振电阻 (R1)	40Ω max.
内置负载电容(CL1/CL2)	15pF
形状	SMD
清洗	对应
长x宽	3.2x1.3mm
质量	12.56mg

注意
1. 本目录是从株式会社村田制作所网站中下载的。规格若有变更，或若其中产品停产，请在订购时确认，恕不另行通知。
2. 本目录因没有足够的空间说明详细规格，仅载明标准规格。因此，在订购产品之前，谨请核准其规格或者办理产品规格表。