DUAL N-Channel Enhancement Mode Power MOSFET

Description

The G120N03D32 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge. It can be used in a wide variety of applications.

General Features

- V_{DS} 30V
- I_D (at V_{GS} = 10V) 28A
- $R_{DS(ON)}$ (at V_{GS} = 10V) < 12mΩ
- $R_{DS(ON)}$ (at V_{GS} = 4.5V) < 17mΩ
- 100% Avalanche Tested
- RoHS Compliant

Application

- Power switch
- DC/DC converters



Schematic diagram



pin assignment

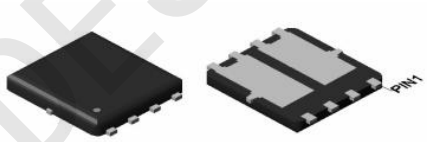

DFN3X3-8L Dual

Ordering Information

Device	Package	Marking	Packaging
G120N03D32	DFN3X3-8L Dual	G120N03	5000pcs/Reel

Absolute Maximum Ratings T_C = 25ºC, unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Continuous Drain Current	I_D	28	A
Pulsed Drain Current (note1)	I_{DM}	112	A
Gate-Source Voltage	V_{GS}	±20	V
Power Dissipation	P_D	20	W
Single pulse avalanche energy （note2）	E_{AS}	25	mJ
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 To 150	ºC

Thermal Resistance

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Ambient	R_{thJA}	50	ºC/W
Maximum Junction-to-Case	R_{thJC}	6.25	ºC/W

NOT FOR NEW DESIGN

Specifications T_J = 25ºC, unless otherwise noted

Parameter	Symbol	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
Static Parameters						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D = 250μA	30	--	--	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 30V, V_{GS} = 0V	--	--	1	μA
Gate-Source Leakage	I_{GSS}	V_{GS} = ±20V	--	--	±100	nA
Gate-Source Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250μA	1.2	1.7	2.2	V
Drain-Source On-Resistance	$R_{DS(on)}$	V_{GS} = 10V, I_D = 10A	--	10	12	mΩ
		V_{GS} = 4.5V, I_D = 10A	--	14	17	
Forward Transconductance	g_{FS}	V_{GS} = 5V, I_D = 10A	--	27	--	S
Dynamic Parameters						
Input Capacitance	C_{iss}	V_{GS} = 0V, V_{DS} = 15V, f = 1.0MHz	--	1089	--	pF
Output Capacitance	C_{oss}		--	133	--	
Reverse Transfer Capacitance	C_{rss}		--	109	--	
Total Gate Charge	Q_g	V_{DD} = 15V, I_D = 10A, V_{GS} = 10V	--	18	--	nC
Gate-Source Charge	Q_{gs}		--	3	--	
Gate-Drain Charge	Q_{gd}		--	4	--	
Turn-on Delay Time	$t_{d(on)}$	V_{DD} = 15V, I_D = 10A, R_G = 3Ω	--	5	--	ns
Turn-on Rise Time	t_r		--	13	--	
Turn-off Delay Time	$t_{d(off)}$		--	21	--	
Turn-off Fall Time	t_f		--	7	--	
Drain-Source Body Diode Characteristics						
Continuous Body Diode Current	I_S	T_C = 25ºC	--	--	28	A
Body Diode Voltage	V_{SD}	T_J = 25ºC, I_{SD} = 10A, V_{GS} = 0V	--	--	1.2	V
Reverse Recovery Charge	Qrr	I_F = 10A, V_{GS} = 0V di/dt=100A/us	--	11	--	nC
Reverse Recovery Time	Trr		--	21	--	ns

NOT FOR NEW DESIGN

Notes

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. EAS condition : Tj=25℃ ,VDD=30V,VGS=10V,L=0.5mH,Rg=25Ω
3. Identical low side and high side switch with identical R_G

Gate Charge Test Circuit

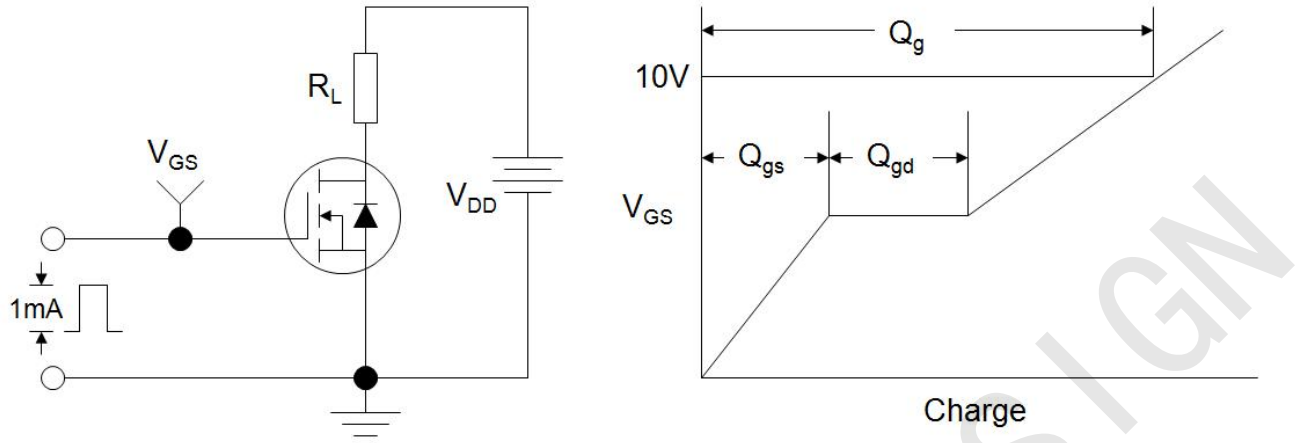

Switch Time Test Circuit

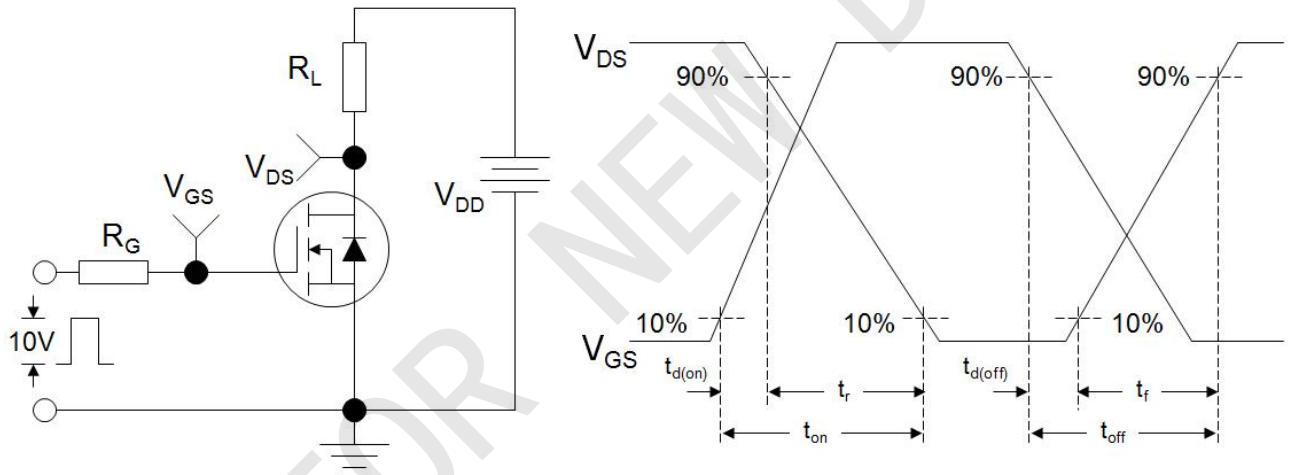

EAS Test Circuit

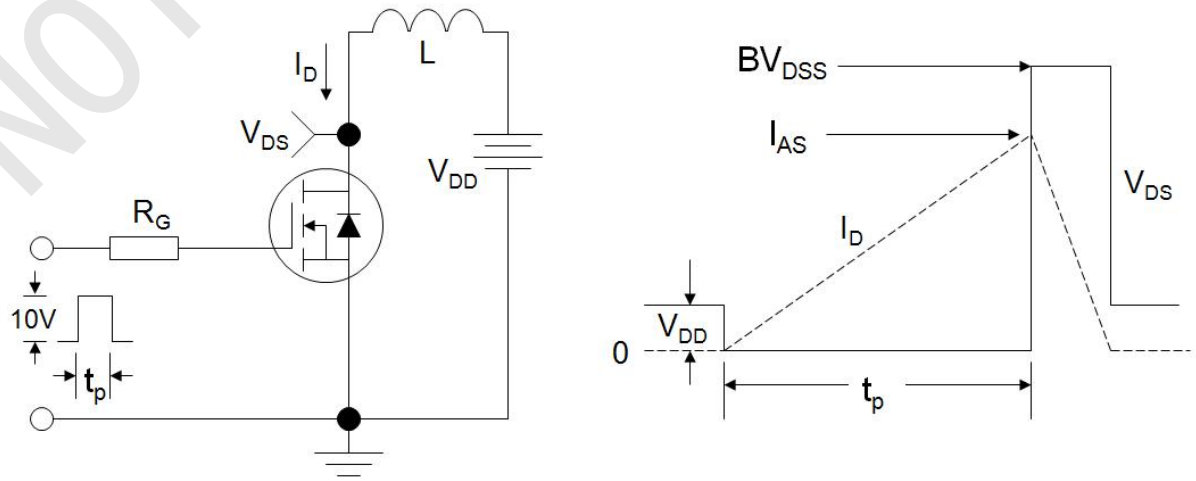

NOT FOR NEW DESIGN

Typical Characteristics T_J = 25ºC, unless otherwise noted

Figure 1. Output Characteristics

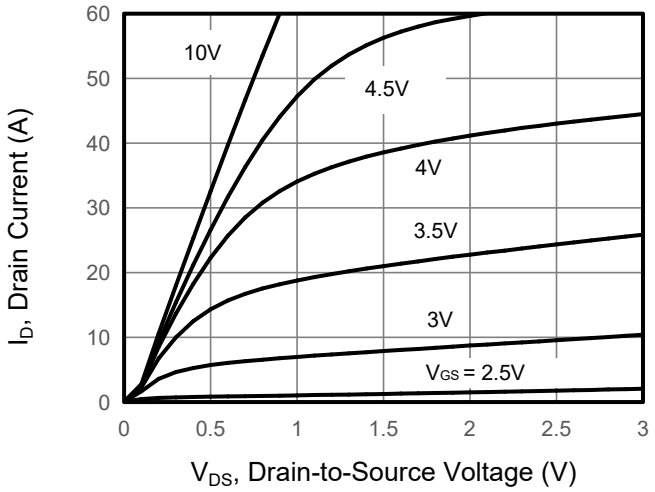

Figure 2. Transfer Characteristics

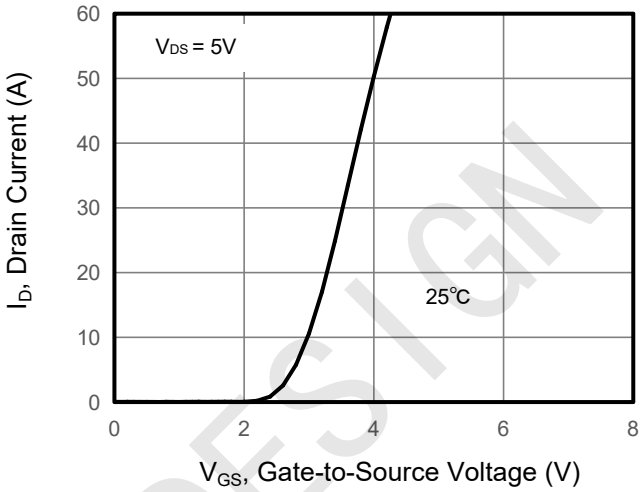

Figure 3. Drain Source On Resistance

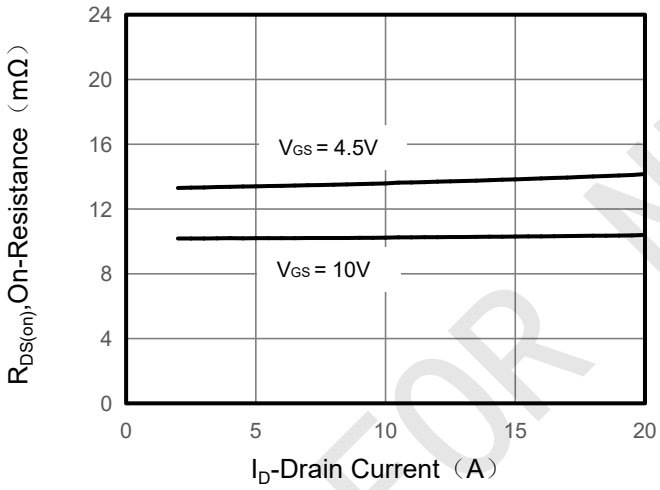

Figure 4. Gate Charge

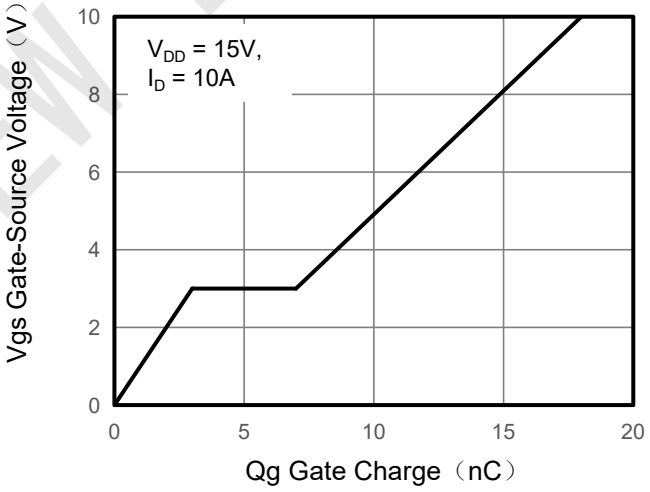

Figure 5. Capacitance

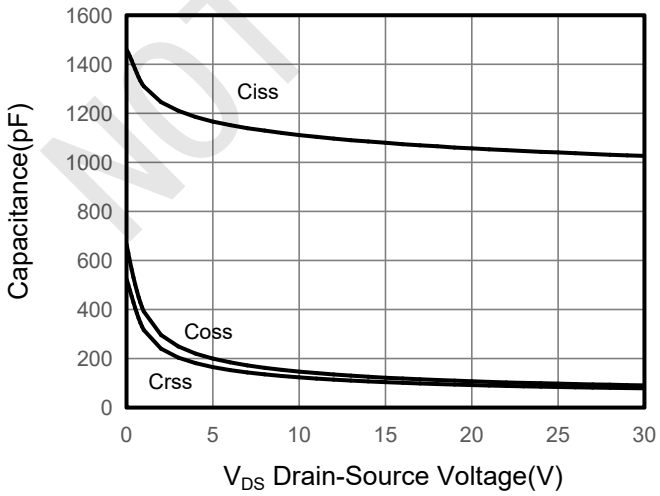

Figure 6. Source-Drain Diode Forward

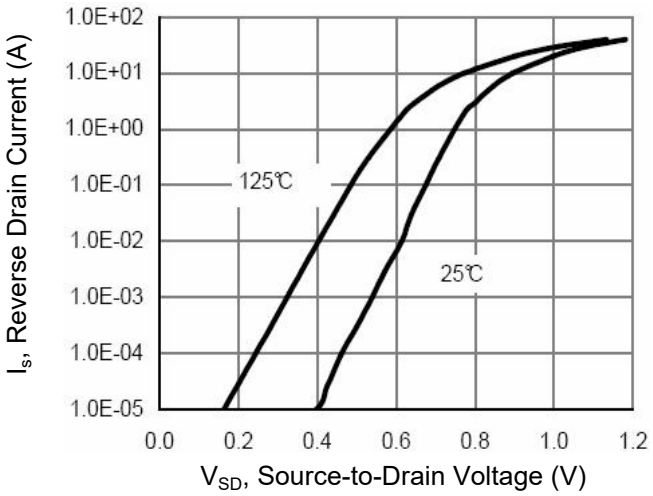

NOT FOR NEW DESIGN

Typical Characteristics T_J = 25ºC, unless otherwise noted

Figure 7. Drain-Source On-Resistance

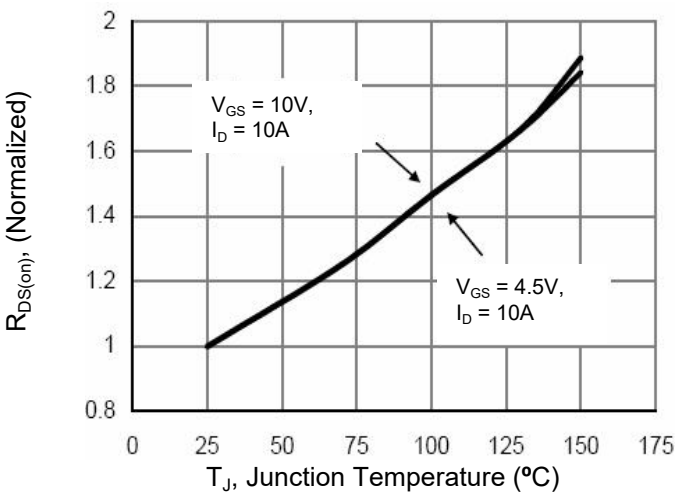

Figure 8. Safe Operation Area

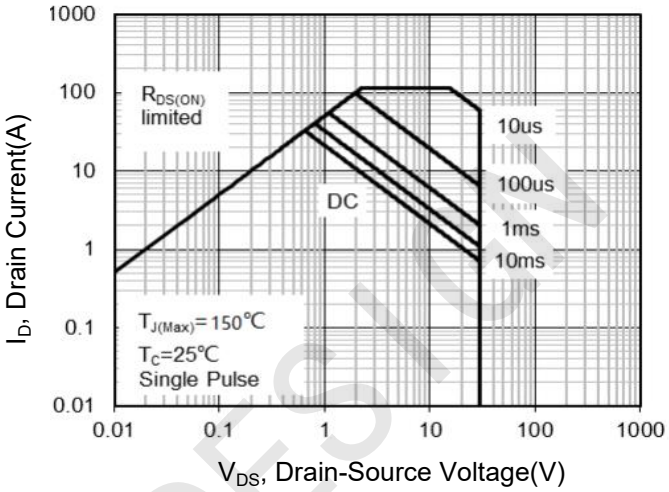

Figure 9. Normalized Maximum Transient Thermal Impedance

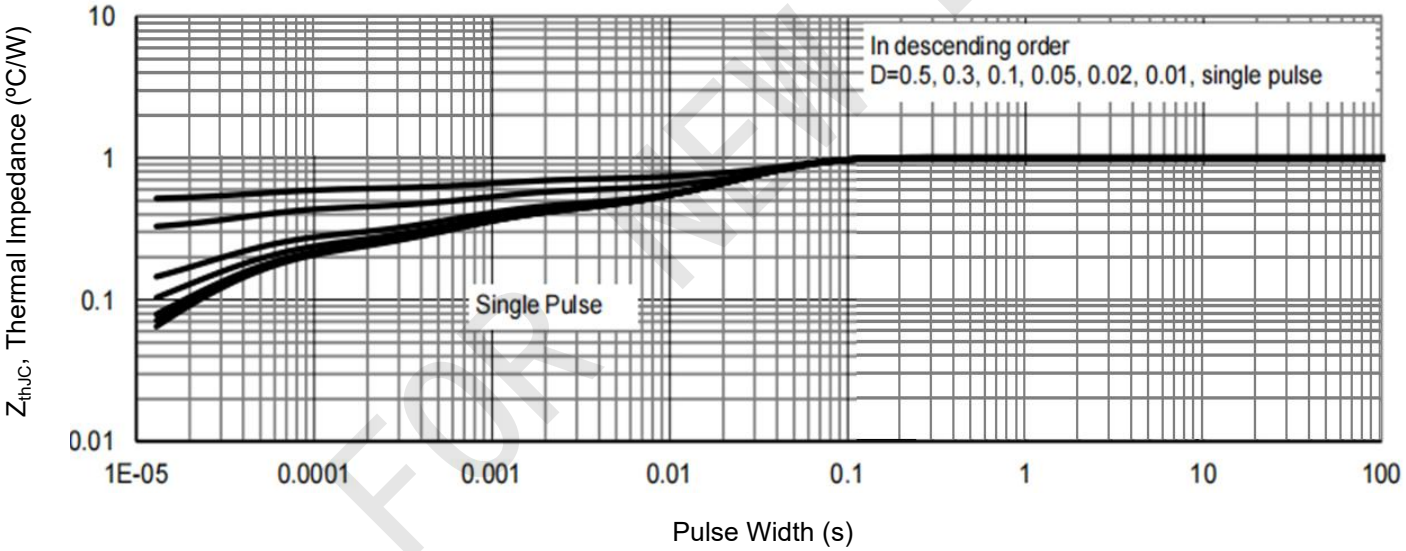

NOT FOR NEW DESIGN

DFN3*3-8L Dual Package Information

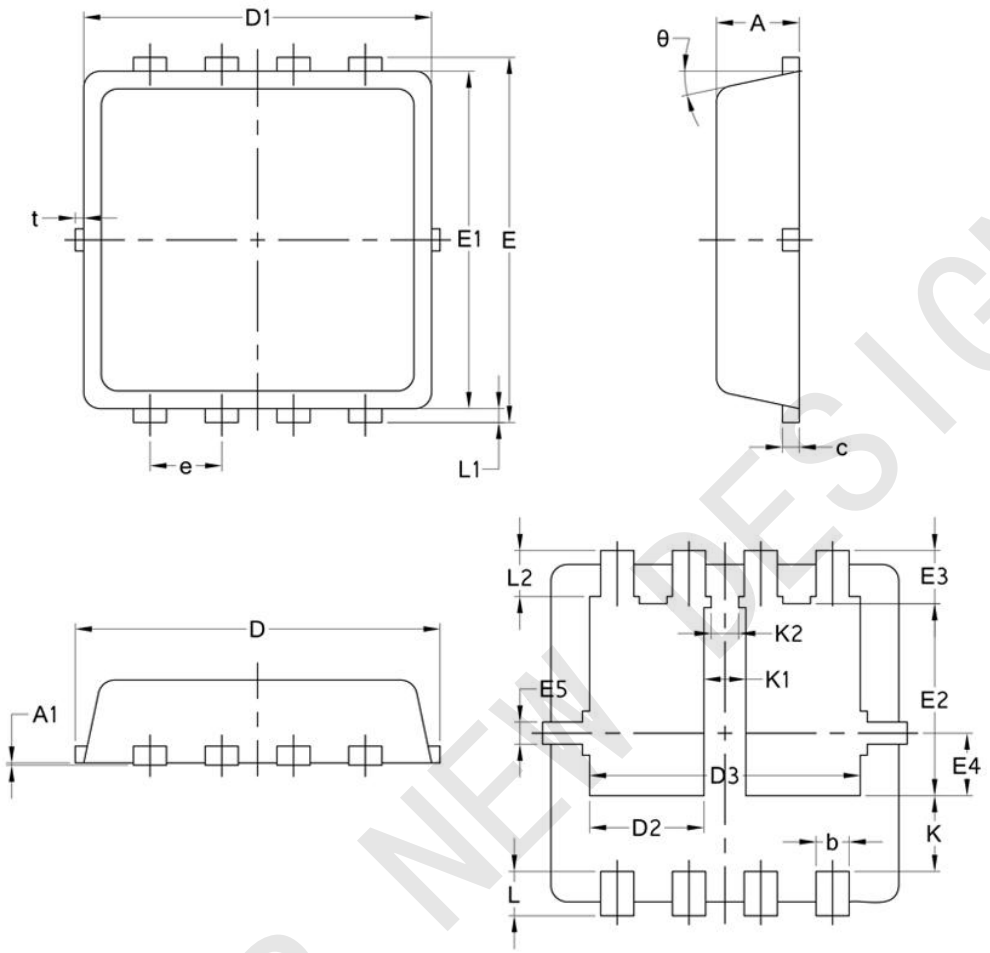

SYMBOL	COMMON						
	MM						
	MIN	NOM	MAX				
A	0.70	0.75	0.85	E2	1.60	1.74	1.90
A1	/	/	0.05	E3	0.28	0.48	0.65
b	0.25	0.30	0.39	E4	0.37	0.57	0.77
c	0.14	0.152	0.20	E5	0.10	0.20	0.30
D	3.20	3.30	3.45	e	0.60	0.65	0.70
D1	3.05	3.15	3.25	K	0.50	0.69	0.80
D2	0.84	1.04	1.24	K1	0.30	0.38	0.53
D3	2.30	2.45	2.60	K2	0.15	0.25	0.35
E	3.20	3.30	3.40	L	0.30	0.40	0.50
E1	2.95	3.05	3.15	L1	0.06	0.125	0.20
θ	10°	12°	14°	L2	0.27	0.42	0.57
				t	0	0.075	0.13

NOT FOR NEW DESIGN